


# Ventiloconvectoare



Ventiloconvectoare de pardoseala tip MKF-4, NEW APPEARANCE

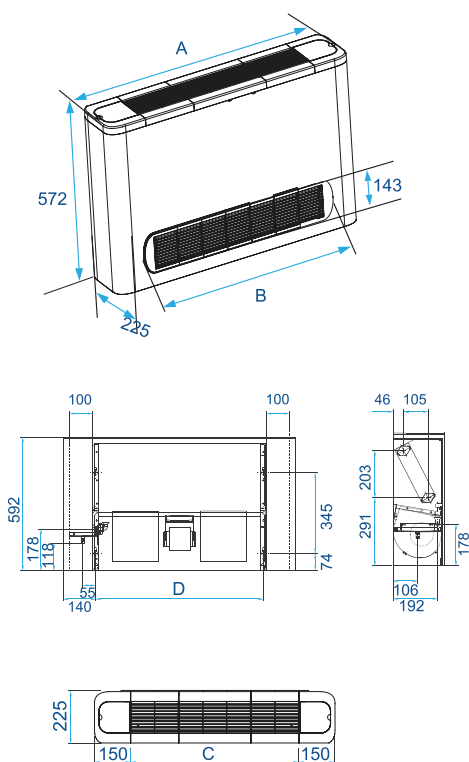

Model	MKF4- 150 (250) MKF5-150(250)	MKF4-300 (400) MKF5-300(400)	MKF4-4 50(500) MKF5-450(500)	MKF4-600 (800,900) MKF5-600(800,900)
A (mm)	800	1000	1200	1500
B (mm)	584	784	984	1284
C (mm)	500	700	900	1200
D (mm)	526	726	926	1226

- Design simplu, carcasa ultra-slim,
- Racordare hidraulica pe partea stanga,
- Instalare simpla, montaj vertical,
- Nivel de zgomot redus,



## OPTIONAL - Termostat KJR-15B/E(P)

1. Termostat pentru controlul temperaturii, incastribil in carcasa ventiloconvectorului.



- Reglarea temperaturii: 17 ~ 30 °C,
- Display LCD,
- Mod functionare: racire/incalzire/ventilatie,
- Selectie viteza ventilator: High/Mediu/Low,
- Tensiune AC220~230, 50/60Hz,
- Temperatura ambientala: - 15 ~ 43 °C,
- Afsarea temperaturii in °F sau °C,
- Nivel de zgomot redus,

2. Set suport picioare, pentru fixare pe pardoseala.

Tip MKF-4			150	250	300	400	450	500	600	800	900
Debit de aer	Max.	m <sup>3</sup> /h	255	425	510	680	765	850	1020	1360	1530
	Med.	m <sup>3</sup> /h	215	360	430	580	650	720	870	1160	1300
	Min.	m <sup>3</sup> /h	190	320	380	510	570	640	765	1020	1150
Putere de racire	Max.	W	1150	1870	2530	3270	3970	4850	5640	6520	7850
	Med.	W	930	1740	2250	2840	3580	4520	4510	5750	7190
	Min.	W	890	1590	1880	2540	3150	3720	3900	4360	6550
Putere de incalzire	Max.	W	2540	4170	5640	7220	8850	10280	12240	15350	18200
	Med.	W	2240	3360	4850	6350	7610	9050	10890	13820	16380
	Min.	W	1880	3130	4230	5490	6550	7710	9180	11670	13650
Putere absorbita		W	27	29	40	46	39	49	63	88	137
Nivel de zgomot (Max/Med/Min)		dB(A)	32/29/26	35/32/30	37/34/32	39/36/34	41/38/36	43/40/38	44/41/39	46/43/40	48/45/42
Debit de apa		l/min	3.3	5.4	7.3	9.4	11.4	13.9	16.2	18.7	22.5
Pierdere presiune apa		kPa	18.3	10.1	14.2	9.5	10.3	24.6	11.4	9.5	12.1
Motor ventilator	Tip		3-viteze								
Ventilator	Tip		Centrifugal, cu lame curbate								
Baterie	Presiune max.	MPa	1,6								
	Randuri		3	3	2	2	3	3	2	2	2
Unitate MKF-4	Dimensiuni(W*H*D)	mm	800*592*225	800*592*225	1000*592*225	1000*592*225	1200*592*225	1200*592*225	1500*592*225	1500*592*225	1500*592*225
	Greutate neta	kg	22.5	22.5	26	26	32.5	32.5	39	39	39
Racorduri tevi	Racord tur-apa	Inch	G3/4"								
	Racord retur-apa	Inch	G3/4"								
	Evacuare condens	mm	Φ16								

Note:

- Conditii racire: Temperatura apei de intrare 7°C, Ridicarea temperaturii cu 5°C, Temperatura de intrare aer 27°C DB,19°CWB.
- Conditii incalzire: Temperatura apei de intrare 50°C, Temperatura de intrare aer 20°C, Debit similar conditiilor de racire.

Distribuitor:

